


# Typicals values

## Nessol D80

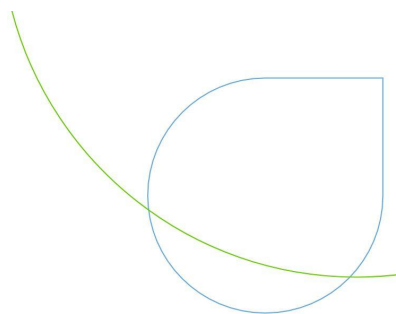

15/10/2019

**Important info :**

This sheet does not provide the specifications but only informed about the typical values reached by our product, for more info contact your specialty product team: [specialty.products@neste.com](mailto:specialty.products@neste.com)

Properties	Unit	Typicals	Test Method
Appearance	-	C&B	ASTM D4176
Colour, Saybolt	-	30	ASTMD 6045
Density at 15°C	kg/m³	~ 810	EN ISO 12185
Flash point	°C	~ 80.5	EN ISO 2719
Distillation			
IBP	°C	~ 204	EN ISO 3405
95%	°C	~ 239	
Drypoint	°C	~ 243	
FBP	°C	~ 245	
Viscosity			
at 20°C	mm²/s	~ 2.5	EN ISO 3104
at 40°C	mm²/s	~ 1.7	
Aromatics	% v/v	~ 0.04	UOP 495
Naphthlanes	mg/l	~ 5	UOP 495
Alkylbenzenes	mg/l	~ 400	UOP 495
Benzene	mg/l	< 1	NM 111 (GC-MS)
Aniline point	°C	~ 73	EN 23015 and EN 116
Sulfur content	mg/kg	< 1	EN ISO 20846
Copper corrosion	-	1a	EN ISO 2160
Bromine index	mg Br/100g	0 - 75	ASTM D2710
Kauributanol value	-	~ 30	ASTM D1133
Refractive index	-	~ 1.444	ASTM D1218
Smoke point	mm	~ 30	ASTM D1322